



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED FLOOD LIGHT WITH LIGHT SENSOR

TECHNICAL DATA

MODEL	VT-44032PS	VT-44052PS	VT-44103PS	VT-44153PS	VT-44203PS
SKU	23186, 23187	23188, 23189	23190, 23191	23192, 23193	23194, 23195
WATTS	30W	50W	100W	150W	200W
LUMENS @WIDE CONE	3100 Lm	5200 Lm	11480 Lm	17220 Lm	22960 Lm
EFFICIENCY	120+ Lm/W		135+ Lm/W		
LIFE SPAN [HOURS]	25,000				
BEAM ANGLE	115°				
CRI	>70				
DF	>0.9				
INPUT POWER	AC: 220-240V, 50Hz				
BODY TYPE	Aluminium				
OPERATION TEMPERATURE	-20 to +45°C				
MAX MOUNTING HEIGHT	<5M				
N.W [KGS]	0.41	0.56	1.1	1.78	2.8
DIMENSION	164.5x153x34mm	183.5x169x34mm	253.5x242.5x40mm	328.5x295x43mm	402.5x349.5x44mm
PROJECTED AREA [MM ²]	25168.5	31011.5	61473.75	96907.5	140673.75
LIGHT SENSOR	70Lux (±25%) ON or OFF				



*This product contains a light source of energy efficiency class<D><E>,where <D><E> shall be replaced by the energy class of the contained light source.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

IP65 RATING

05 YEAR WARRANTY*



PRO SERIES

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Replace any cracked protective shield.
- Terminal block not included.
- Proper grounding should be ensured throughout the installation.
- Minimum distance from lighted objects 1m.


NOTE: To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.




This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



INSTALLATION DIAGRAM

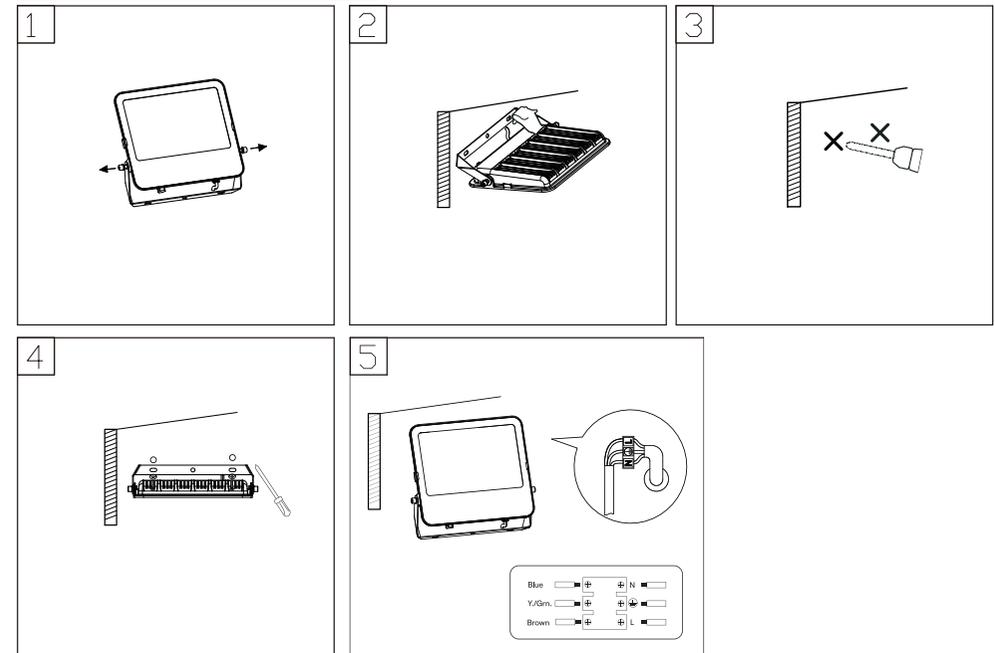

INSTALLATION INSTRUCTION

• DO NOT USE IN AREAS WITH LIMITED VENTILATION OR OUTSIDE THE RATED AMBIENT TEMPERATURE RANGE. *CON- NECT WITH WATERPROOF CABLE HOUSE ONLY. *ENSURE ELECTRICITY IS SWITCH OFF BEFORE INSTALLATION.


• Please do not mount to a surface that is prone to vibrations.*

Remove the screw and the bracket afterward. (Figure 1)Before drilling, mark the hole position for fixing the bracket onto the wall (Screw not supplied). (Figure 2)

• Screw the retaining bracket to the wall with a suitable quantity of screws. (Figure 4)

• Mount the bracket back to the fixture. Adjust the floodlight according to the desired position. Tighten the screw. (Figure 5) Connect your main cable (HO5RN-F3G1.0mm2 Recommended) with the input lead of our product through the waterproof junction box. Note, the line (-) of the lead. (Need to use the junction box of IP65 or above, ensure to tighten the waterproof screw) Switch on the power to make sure if the product is working.

DISASSEMBLY DIAGRAM

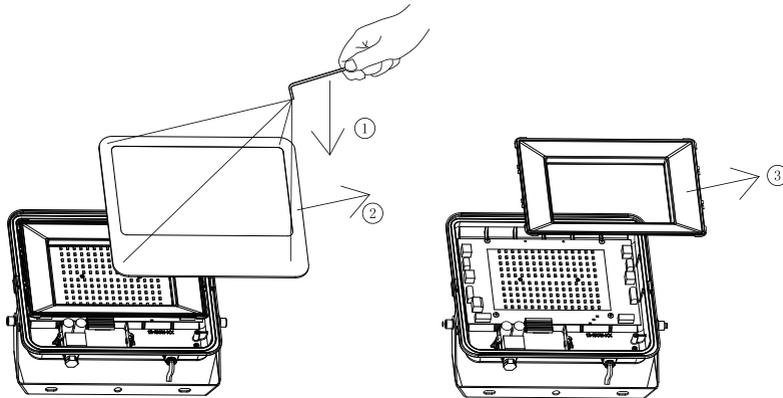

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC HOUSE, KELPATRICK ROAD, SLOUGH, BERKSHIRE, SL1 6BW, UK.