Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: V- | TAC |
|-----------------------------------|-----|
| | |

Supplier's address: V-TAC House, Kelpatrick Road, Slough, Berkshire, SL1 6BW, UK

Model identifier: 23409

| Type of light source: |
|-----------------------|
|-----------------------|


| Lighting technology used: | LED | Non-directional or directional: | NDLS |
|-------------------------------|------------|---------------------------------|------|
| Light source cap-type | L/N/G Con- | | |
| (or other electric interface) | nection | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Product parameters | | | | | |
|------------------------------------------------------------------|--------------------------------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|
| Parameter | | Value | Parameter | Value | |
| | | General product p | arameters: | | |
| Energy consummode (kWh/10 up to the neares | 00 h), rounded | 5 | Energy efficiency class | F | |
| | ,, | 450 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 | |
| On-mode pow pressed in W | ver (P _{on}), ex- | 5,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,50 | |
| | andby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 | |
| Outer dimensions without separate control gear, lighting control | Height | 265 | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image | |
| | Width | 15 | | in last page | |
| | Depth | 15 | | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|-------------------------------------------------------------------------------------------------------------------------|--------------|----------------------------------------|----------------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordinates (x and y) | 0,434 0,403 | | |
| Parameters for LED and OLED lig | tht sources: | | | | |
| R9 colour rendering index value | 50 | Survival factor | 1,00 | | |
| the lumen maintenance factor | 0,96 | | | | |
| Parameters for LED and OLED mains light sources: | | | | | |
| displacement factor (cos φ1) | 0,50 | Colour consistency in McAdam ellipses | 6 | | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | _(b) | If yes then replace- ment claim (W) | - | | |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,4 | | |

(a)_{'-'}: not applicable; (b)_{'-'}: not applicable;

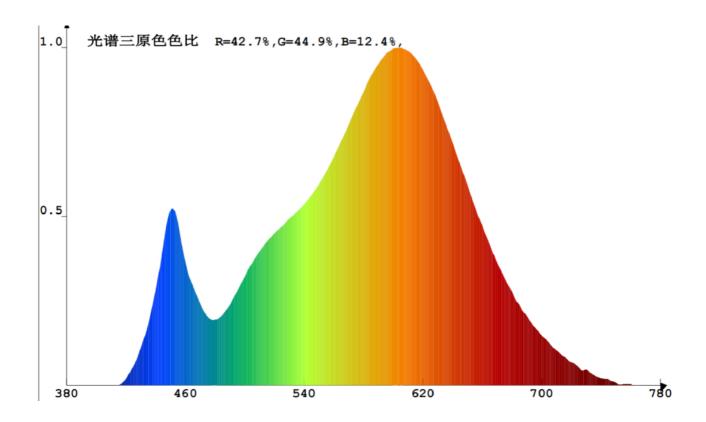

Model placed on the Union market from 15/12/2023



EPREL registration number: 1876719 https://eprel.ec.europa.eu/qr/18

76719

Supplier: V-TAC Europe Ltd (Manufacturer) Website: www.v-tac.eu

Customer care service:

Name: V-TAC Europe Ltd. Website: www.v-tac.eu

Email: office@v-tac.eu Phone: +359290566

Address:

bul. Rozhen 41

Sofia Bulgaria