Product Information Sheet

On-mode power (Pon),

Networked standby

(P_{net}) for CLS, expressed in W

and rounded to the second dec-

Height

Width

Depth

power

pressed in W

Outer dimen-

sions without

separate con-

trol gear, light-

control

imal

ing

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: V-TAC				
Supplier's address: V-TAC House	e, Kelpatrick Road, S	lough, Berkshire, SL1 6E	SW, UK	
Model identifier: 23573 Type of light source:				
Light source cap-type	E27			
(or other electric interface)				
Mains or non-mains:	MLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	No	
	Product para	meters		
Parameter	Value	Parameter	Value	
General product parameters:				
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	F	
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temper-	6 500	

40,0

191

118

118

atures, rounded to the nearest 100 K, that can be set

Standby power (P_{sb}),

expressed in W and rounded to the sec-

Colour rendering in-

dex, rounded to the

nearest integer, or

the range of CRI-values that can be set

Spectral power dis-

range 250 nm to 800

nm, at full-load

in

ond decimal

tribution

0,00


80

See image

in last page

parts and non- lighting con- trol parts, if any (millime- tre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordi-	0,313	
		nates (x and y)	0,337	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a)_{'-'}: not applicable; (b)_{'-'}: not applicable;

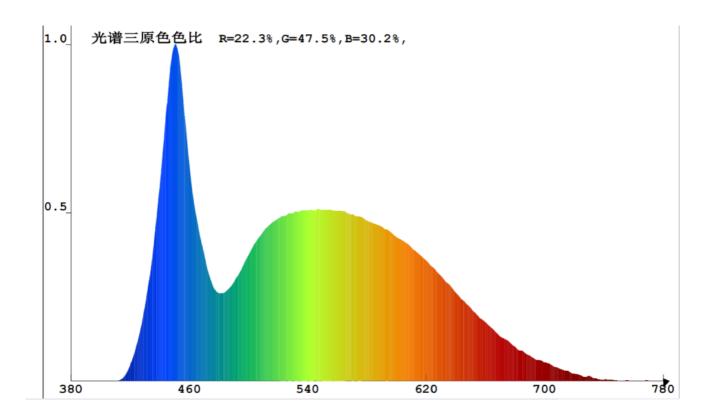

Model placed on the Union market from 05/12/2023



EPREL registration number: 1863733 https://eprel.ec.europa.eu/qr/18

63733

Supplier: V-TAC Europe Ltd (Manufacturer) Website: www.v-tac.eu

Customer care service:

Name: V-TAC Europe Ltd. Website: www.v-tac.eu

Email: office@v-tac.eu Phone: +359290566

Address:

bul. Rozhen 41

Sofia Bulgaria