Product Information Sheet

Supplier's name or trade mark: V-TAC


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier shame of trade mark.			
Supplier's address: V-TAC House	e, Kelpatrick Road, S	Slough, Berkshire, SL1 6E	BW, UK
Model identifier: 21113			
Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	E14		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No
	Product para	meters	
Parameter	Value	Parameter	Value
	General product p	parameters:	
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the	6 500

(120º) or in a na	rrow cone (90º)		est 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	
On-mode pow pressed in W	ver (P _{on}), ex-	7,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00
(P _{net}) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80
Outer dimen-	Height	100	Spectral power dis-	See image
sions without	Width	37	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	37	range 250 nm to 800 nm, at full-load	
				Page 1 / 4

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	45			
		Chromaticity coordinates (x and y)	0,318 0,343			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	20	Survival factor	1,00			
the lumen maintenance factor	0,96					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9			

(a)_{'-'}: not applicable; (b)_{'-'}: not applicable;

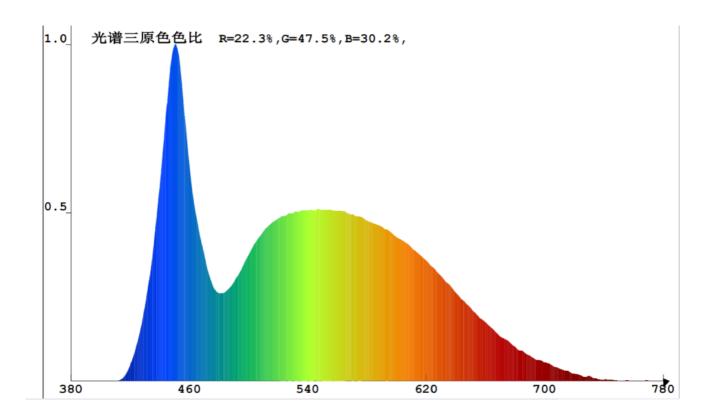

Model placed on the Union market from 20/11/2023



EPREL registration number: 1846598 https://eprel.ec.europa.eu/qr/18

46598

Supplier: V-TAC Europe Ltd (Manufacturer) Website: www.v-tac.eu

Customer care service:

Name: V-TAC Europe Ltd. Website: www.v-tac.eu

Email: office@v-tac.eu Phone: +359290566

Address:

bul. Rozhen 41

Sofia Bulgaria