## **Product Information Sheet**

ing


control

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources		2 (20) 2013, 2	ors with regard to energ	B) 1400 01		
Supplier's name or trade mark: V-TAC						
Supplier's address: V-TAC House, Kelpatrick Road, Slough, Berkshire, SL1 6BW, UK  Model identifier: 78611						
Lighting technology used:		LED	Non-directional or directional:	NDLS		
Light source cap-type (or other electric interface)		L/N Connection				
Mains or non-mains:		MLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield:		No	Dimmable:	No		
Product parameters						
Parameter		Value	Parameter	Value		
		General product p	parameters:			
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		12	Energy efficiency class	F		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P <sub>on</sub> ), expressed in W		12,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	-		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	28	Spectral power dis-	See image		
sions without separate con- trol gear, light-	Width Depth	171 171	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,439		
		nates (x and y)	0,401		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	10	Survival factor	1,00		
the lumen maintenance factor	0,96				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4		

(a)<sub>'-'</sub>: not applicable; (b)<sub>'-'</sub>: not applicable;

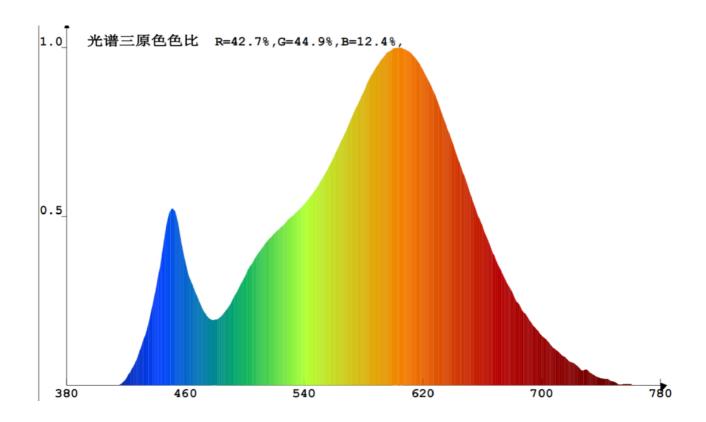

Model placed on the Union market from 09/04/2024.



**EPREL registration number:** 1994775 https://eprel.ec.europa.eu/qr/19

94775

Supplier: V-TAC Europe Ltd (Manufacturer) Website: www.v-tac.eu

**Customer care service:** 

Name: V-TAC Europe Ltd. Website: www.v-tac.eu

Email: office@v-tac.eu Phone: +359290566

Address:

bul. Rozhen 41

Sofia Bulgaria